

YUCHAI


U10

Yuchai U10 1Ton Mini Excavator

NEW ■ EXCAVATORS ■ 1-1.9T (MINI)

\$24,189

AUD inc. GST

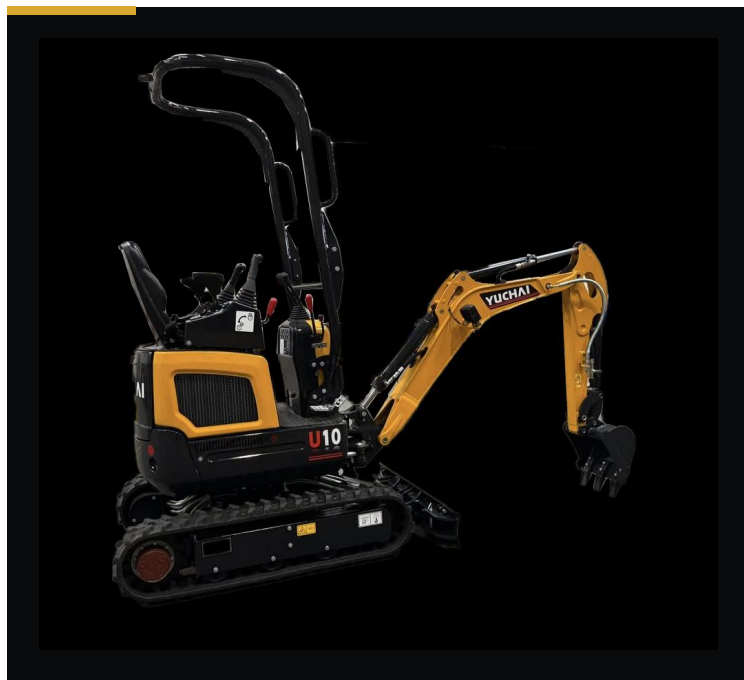

WEIGHT

1050 kg

POWER

13.9 hp

DIG DEPTH

1925/2000 mm

BUCKET

0.02 m³

SPECIFICATIONS

Engine	Kubota D722	Standard Bucket Width	356mm
Rated Power	13.9 hp	Walking Speed	1.5 / 3 km/h
Digging Depth	1925/2000mm	Swing Speed of Platform	8.3 rpm
Width	750/990mm	Auxiliary Flow	11 l/m
Weight	1050kg	Boom Swing Angle (Left/Right)	55°
Standard Bucket Capacity	0.02m ³		

OVERVIEW

The new Yuchai U10 is a 1Ton micro excavator built with the professional operator in mind. It features a class leading Kubota diesel engine. Backed by a 4 year / 4000hr warranty with local spare parts support the U10 is a powerful digger that offers exceptional value for money.

STANDARD SPECIFICATION

- ✓ **Kubota Engine**
Powered by a Kubota D722 rated at 13.9 hp.
- ✓ **Expanding Tracks**
Variable-width undercarriage for tight-access work — 750/990mm overall width.
- ✓ **Hammer / Auger Piping**
Auxiliary hydraulic piping fitted as standard, 11 l/m auxiliary flow, for hammers, auger drives and grabs.

1300 241 132

sales@eliteequipt.com

Unit 4/5-7 Graham St, Underwood QLD 4119

ABN 29 509 705 048 · eliteequipt.com

E&OE. Specifications subject to change without notice.

FULL SPECIFICATION

36 published figures – manufacturer's data

BASIC

Machine weight	1050 kg
Bucket capacity	0.02~0.026 m ³
Width of bucket	356 mm

PERFORMANCE

Engine model	Kubota D722
Engine power	10.4/2500 kW/rpm
Max. gradeability	30 °
Max. digging force of arm	5.4 kN
Max. digging force of bucket	10.4 kN
Traveling speed	3.0/1.5 km/h
Max. hauling force	22.5 kN
Slewing speed of platform	8.3 rpm

OPERATING RANGE

Max. digging height	3020/3110 mm
Max. digging depth	1925/2000 mm
Max. digging radius	3395/3465 mm
Max. digging radius on ground level	3345/3420 mm
Max. dumping height	2220/2130 mm
Min. slewing radius	1365 mm
Max. vertical digging depth	1360/1030 mm

TRANSPORT DIMENSIONS

Overall length	2985 mm
Overall width	750 mm
Overall height	2290 mm

OTHER

Width of undercarriage	750/990 mm
Length of track	1365 mm
Width of track	180 mm
Height between undercarriage and ground	145 mm
Height between platform and ground	400 mm
Platform tail turning radius	565 mm
Length to centre of rollers	550 mm
Track gauge	570/810 mm
Working pressure	17.5 MPa
Arm length	900 mm
Boom length	1450 mm
Steering head angle	55 °
Flow rate	11 L/min
Fuel tank capacity	11 L
Hydraulic oil tank capacity	12 L

WORKING RANGE
TRANSPORT DIMENSIONS

millimetres

