

YUCHAI


U27

Yuchai U27 2.7Ton Zero Swing Excavator

NEW ■ EXCAVATORS ■ 2-5.9T (MINI)

\$49,489

AUD inc. GST

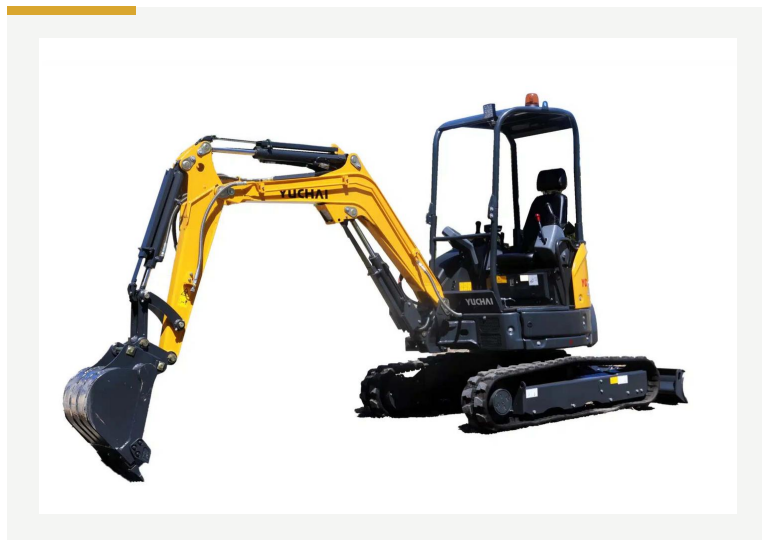

WEIGHT

2700 kg

POWER

20 hp

DIG DEPTH

2540 mm

BUCKET

0.09 m³

SPECIFICATIONS

Engine	Yanmar 3TNV76	Standard Bucket Width	500mm
Rated Power	20 hp	Walking Speed	4.2/2.3km/h
Digging Depth	2540mm	Swing Speed of Platform	10~12rpm
Width	1500mm	Auxiliary Flow	28 l/m
Weight	2700kg	Boom Swing Angle (Left/Right)	47° (L) / 47° (R)
Standard Bucket Capacity	0.09m ³		

OVERVIEW

The new Yuchai U27 Pro is a 2.7Ton true zero tail swing mini excavator. Powered by a class leading 19hp Yanmar diesel engine matched to a high flow, load sensing piston pump and quality main control valve for powerful yet smooth hydraulic operation. You can access work sites quickly and easily with 2 speed travel motors and the true zero swing platform and swing boom makes working in tight areas a breeze. Take a close look at the Yuchai difference, the U27 features like high strength cast iron boom knuckle and end joints combined with quality bushes and hardened pins makes this excavator stand above its opposition. The machine features full pilot control systems, a large LCD dash and hammer auger piping is standard for augers and hammers. The machine is ready for quick hitch and tilt hitch installations for extra functionality. YUCHAI Heavy Industry Co. Ltd. was founded in 1989 and they were the first enterprise in China to produce mini-excavators and sell them to the world. With more than 30 years of innovation and development experience you can be assured you are buying a high-quality machine with exceptional support and user experience.

STANDARD SPECIFICATION

- ✓ **Yanmar Engine**
Powered by a Yanmar 3TNV76 rated at 20 hp.
- ✓ **2 Speed Travel**
Two-speed travel motors — 4.2/2.3km/h.
- ✓ **Hammer / Auger Piping**
Auxiliary hydraulic piping fitted as standard, 28 l/m auxiliary flow, for hammers, auger drives and grabs.

1300 241 132

sales@eliteequipt.com

Unit 4/5-7 Graham St, Underwood QLD 4119

ABN 29 509 705 048 · eliteequipt.com

E&OE. Specifications subject to change without notice.

FULL SPECIFICATION

26 published figures – manufacturer's data

BASIC

Machine weight	2700 kg
Bucket capacity	0.09 m ³

PERFORMANCE

Engine model	Yanmar
Engine power	14.5/2400 kW/rpm
Max. gradeability	30 °
Max. digging force of arm	14.4 kN
Max. digging force of bucket	23.1 kN
Traveling speed	4.2/2.3 km/h
Slewing speed of platform	10~12 rpm

OPERATING RANGE

Max. digging height	4170 mm
Max. digging depth	2540 mm
Max. digging radius	4520 mm
Max. digging radius on ground level	4400 mm
Max. dumping height	2780 mm
Min. slewing radius	1950 mm
Max. vertical digging depth	2240 mm

TRANSPORT DIMENSIONS

Overall length	4110 mm
Overall width	1500 mm
Overall height	2490 mm

OTHER

Width of undercarriage	1500 mm
Length of track	2040 mm
Height between undercarriage and ground	320 mm
Height between platform and ground	525 mm
Platform tail turning radius	750 mm
Fuel tank capacity	30 L
Hydraulic oil tank capacity	25 L

WORKING RANGE
TRANSPORT DIMENSIONS

millimetres

