

YUCHAI


U35SR Pro

Yuchai U35SR Pro 3.8Ton Zero Swing Excavator

NEW ■ EXCAVATORS ■ 2-5.9T (MINI)

\$58,289

AUD inc. GST

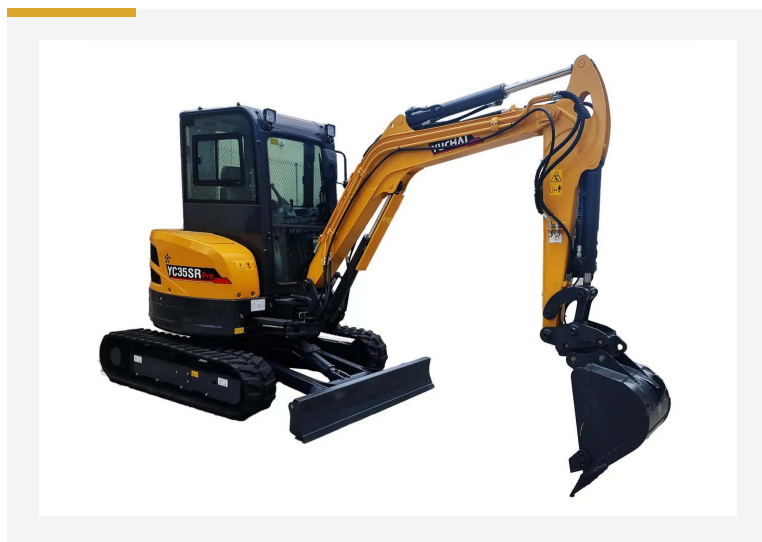

WEIGHT

3860 kg

POWER

24 hp

DIG DEPTH

3170 mm

BUCKET

0.12 m³

SPECIFICATIONS

Engine	Yanmar 3TNV88	Standard Bucket Width	617mm
Rated Power	24 hp	Walking Speed	3.1 / 4.8 km/h
Digging Depth	3170mm	Swing Speed of Platform	11-13 rpm
Width	1800mm	Auxiliary Flow	44 l/m
Weight	3860kg	Boom Swing Angle (Left/Right)	50° (L) / 70° (R)
Standard Bucket Capacity	0.12m ³		

OVERVIEW

The new Yuchai U35 Pro is a 3.8Ton zero tail swing mini excavator which come standard with an extra large a/c cabin and counter weight. Powered by a class leading 24hp Yanmar diesel engine matched to a high flow, load sensing piston pump and quality main control valve for powerful yet smooth hydraulic operation. You can access work sites quickly and easily with 2 speed travel motors and the true zero swing platform and swing boom makes working in tight areas a breeze. Take a close look at the Yuchai difference, the U35 features an extra large, fully approved ROPS a/c cabin which tilts forward for easy access to engine and hydraulic systems. Safety systems such as movement alarm, flashing light and Australian OH&S compliant hitches all come standard on the U35SR Pro. The U35SR Pro Tilt model features dual auxiliary piping with electro-proportional hand controls and a full tilting hydraulic hitch. YUCHAI Heavy Industry Co. Ltd. was founded in 1989 and they were the first enterprise in China to produce mini-excavators and sell them to the world.

STANDARD SPECIFICATION

- ✓ **Yanmar Engine**
Powered by a Yanmar 3TNV88 rated at 24 hp.
- ✓ **2 Speed Travel**
Two-speed travel motors — 3.1 / 4.8 km/h.
- ✓ **A/C ROPS Cabin**
Air-conditioned ROPS cabin fitted as standard.
- ✓ **Hammer / Auger Piping**
Auxiliary hydraulic piping fitted as standard, 44 l/m auxiliary flow, for hammers, auger drives and grabs.

1300 241 132

sales@eliteequipt.com

Unit 4/5-7 Graham St, Underwood QLD 4119

ABN 29 509 705 048 · eliteequipt.com

E&OE. Specifications subject to change without notice.

FULL SPECIFICATION

30 published figures – manufacturer's data

BASIC

Machine weight	3860 kg
Bucket capacity	0.12 m ³
Width of bucket	617 mm

PERFORMANCE

Engine model	Yanmar 3TNV88
Engine power	18.2/2200 kW/rpm
Max. gradeability	35 °
Max. digging force of arm	25.8 kN
Max. digging force of bucket	32.7 kN
Traveling speed	3.1/4.8 km/h
Max. hauling force	29 kN
Slewing speed of platform	11-13 rpm

OPERATING RANGE

Max. digging height	5156 mm
Max. digging depth	3170 mm
Max. digging radius	5557 mm
Max. digging radius on ground level	5438 mm
Max. dumping height	3588 mm
Min. slewing radius	2260 mm
Max. vertical digging depth	2620 mm

TRANSPORT DIMENSIONS

Overall length	4853 mm
Overall width	1800 mm
Overall height	2575 mm

OTHER

Width of undercarriage	1800 mm
Length of track	2093 mm
Width of track	300 mm
Height between undercarriage and ground	347 mm
Height between platform and ground	572 mm
Platform tail turning radius	1014 mm
Track gauge	1500 mm
Fuel tank capacity	52 L
Hydraulic oil tank capacity	40 L

WORKING RANGE
TRANSPORT DIMENSIONS

millimetres

