

YUCHAI


YC60-9

Yuchai YC60-9 5.8Ton Excavator

NEW ■ EXCAVATORS ■ 2-5.9T (MINI)

\$71,489

AUD inc. GST

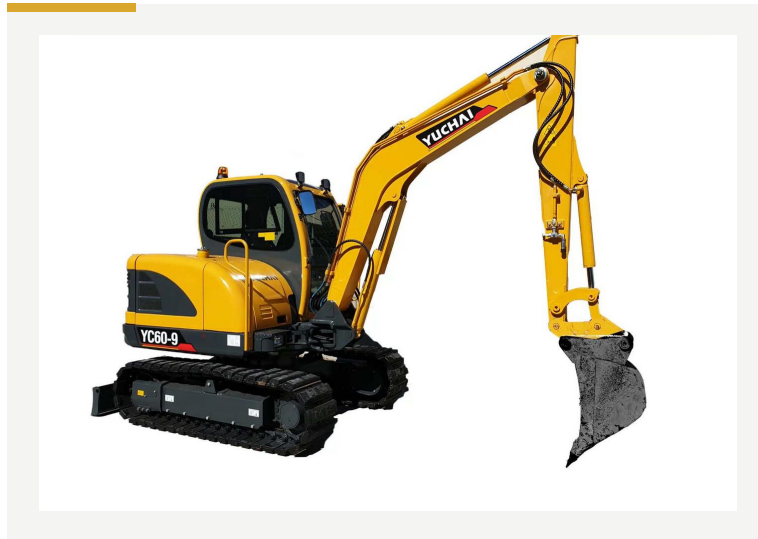

WEIGHT

5700 kg

POWER

41 hp

DIG DEPTH

3720 mm

BUCKET

0.21 m³

SPECIFICATIONS

Engine	Kubota V2403	Standard Bucket Width	742mm
Rated Power	41hp	Walking Speed	2.2 / 3.6 km/h
Digging Depth	3720mm	Swing Speed of Platform	9-11 rpm
Width	1920mm	Auxiliary Flow	44 l/m
Weight	5700kg	Boom Swing Angle (Left/Right)	50° / 70°
Standard Bucket Capacity	0.21m ³		

OVERVIEW

The YC60-9 is the third generation 6 Ton excavator from Yuchai Heavy Industries. Powered by a class leading 41hp Kubota diesel engine matched to a high flow, load sensing piston pump and quality main control valve for powerful yet smooth hydraulic operation. The YC60-9 is a full featured excavator with approved A/C ROPS cabin, swing boom, bi-directional piping and front blade. Take a close look at the Yuchai difference, the YC60-9 offers an extra large, fully approved ROPS a/c cabin and full width rear door for easy access to maintenance items. Safety systems such as movement alarm, flashing light and Australian OH&S compliant hitches all come standard with the option to upgrade to dual auxiliary piping with electro-proportional hand controls for tilt quick hitches and rotating grabs. YUCHAI Heavy Industry Co. Ltd. was founded in 1989 and they were the first enterprise in China to produce mini-excavators and sell them to the world. With more than 30 years of innovation and development experience you can be assured you are buying a high-quality machine with exceptional support and user experience.

STANDARD SPECIFICATION

- ✓ **Kubota Engine**
Powered by a Kubota V2403 rated at 41hp.
- ✓ **2 Speed Travel**
Two-speed travel motors — 2.2 / 3.6 km/h.
- ✓ **A/C Cabin**
Air-conditioned cabin fitted as standard.
- ✓ **Hammer / Auger Piping**
Auxiliary hydraulic piping fitted as standard, 44 l/m auxiliary flow, for hammers, auger drives and grabs.

1300 241 132

sales@eliteequipt.com

Unit 4/5-7 Graham St, Underwood QLD 4119

ABN 29 509 705 048 · eliteequipt.com

E&OE. Specifications subject to change without notice.

FULL SPECIFICATION

30 published figures – manufacturer's data

BASIC

Machine weight	5700 kg
Bucket capacity	0.21 m ³
Width of bucket	742 mm

PERFORMANCE

Engine model	Kubota V2403
Engine power	30.7/2200 kW/rpm
Gradeability	70% (35°)
Max. digging force of arm	27.5 kN
Max. digging force of bucket	36.6 kN
Traveling speed	2.2/3.6 km/h
Max. hauling force	46.5 kN
Slewing speed of platform	9~11 rpm

OPERATING RANGE

Max. digging height	5740 mm
Max. digging depth	3720 mm
Max. digging radius	6065 mm
Max. digging radius on ground level	5945 mm
Max. dumping height	4040 mm
Min. slewing radius	2175 mm
Max. vertical digging depth	2750 mm

TRANSPORT DIMENSIONS

Overall length of transportation	5656 mm
Overall width	1920 mm
Overall height	2585 mm

OTHER

Width of undercarriage	1920 mm
Length of track	2494 mm
Width of track	400 mm
Height between undercarriage and ground	316 mm
Height between platform and ground	670 mm
Platform tail turning radius	1520 mm
Track gauge	1960 mm
Fuel tank capacity	103 L
Hydraulic oil tank capacity	74 L

WORKING RANGE
TRANSPORT DIMENSIONS

millimetres

