

TP44-TD MINI-ASPHALT TRACK PAVER

SALSCO

SIDEWALKS CART PATHS TRENCHES



The TP44-TD Track Paver Is Versatile, Durable And Efficient

The TP44-TD Mini-Asphalt Paver is a highly versatile and efficient machine engineered for sidewalks, cart paths, trails, and more. Designed with service and maintenance in mind, the TP44-TD features a clean, simple design and extra-large drive motors to ensure years of reliable performance.


The TP44-TD is specifically designed to fit into a 48-inch trench, making it an ideal choice for contractors seeking efficiency and precision in confined spaces.

Attachments:

Screed Extensions – Expands the paving width up to 7 feet for larger scale projects.


Cutoff Plates – Creates clean, square pavement edges for seamless passes, ensuring minimal seams that blend with a pavement roller.

Extra-Large Cutoff Door – Provides enhanced material control within the hopper for precise application.

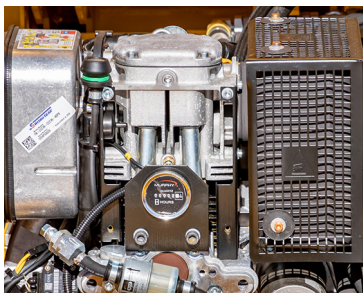

14 HP Hatz Diesel

The Hatz 1D81Z-9221 Diesel Engine delivers 14 HP of reliable power with electric start and is EPA Tier IV compliant, ensuring efficiency and reduced emissions.

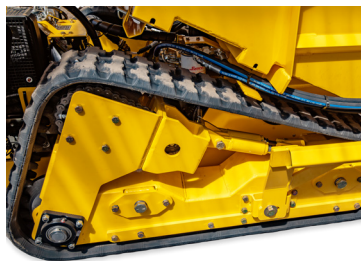

Heavy Duty Track

Bridgestone extreme-duty rubber tracks, fixed 38" drive tread for screed compatibility. The hydrostatic drive motor enables smooth variable forward and reverse control for precise operation.



Movable End-Gates

Hydraulic End-Gates adjust for precise widths from 24" to 72", ensuring a perfect path. Ruler markings provide accuracy for seamless paving.



Close-able Hopper Door

Extra-large cutoff gate with a hydraulically close-able hopper door for precise material flow control. Dual cylinders and flow regulators ensure smooth and even door operation.



TP44-TD MINI-ASPHALT TRACK PAVER



Product Specifications

Length	123.5" in (314cm)
Width	55" in (140cm)
Height	47.5" in (121cm)
Weight	4,400 lbs (1996kg)

Standard Equipment

Engine	Hatz 1D81Z Diesel Engine Electric Start EPA Tier IV 14 HP
Pump	Dual hydrostatic, variable speed
Hoses	SAE JIC hose ends & fittings. 3,000 P.S.I., Working, 12,000 P.S.I., Burst.
Battery	12 volt, automotive type, 850 CCA.
Fuel Tank	Steel, 8.9 gallon capacity
Hydraulic Tank	Steel 8 gallon capacity
Hopper	Dual hopper, 1/4" thick, steel plate. Inside hopper tilts to 52° angle for ease of dumping material. 1.85 sq. yd. capacity
Screed	40" wide, with crown/invert adjustment, power end gates and end gate adjustment plates for uniform texture.
Auger Assembly	Two (2) 9" cast augers, with independent hydraulic drive, forward and reverse.
Drive	Hydrostatic; variable forward and reverse
Track Assembly	Heavy duty Bridgestone tracks. Tracks are fixed at 38" to accommodate screed style.
Controls	All controls are located at the rear of the machine over the screed, for ease of operation.
Main Frame	One (1) piece, 1/4" thick steel main frame. 2" x 2" square tubing supports
Welds	Continuous welds where needed for durability

Optional Equipment

Screed Extensions	6" Screed extensions
Screed Heater	A heating system that warms the screed to improve asphalt flow
Hopper Extensions	Hopper Panel Extensions in 71 or 84" widths
Hopper Plate	Hopper Cut Off Plates



ID:187222446722