

YUCHAI


U18

Yuchai U18 1.8Ton Mini Excavator

NEW ■ EXCAVATORS ■ 1-1.9T (MINI)

\$32,989

AUD inc. GST

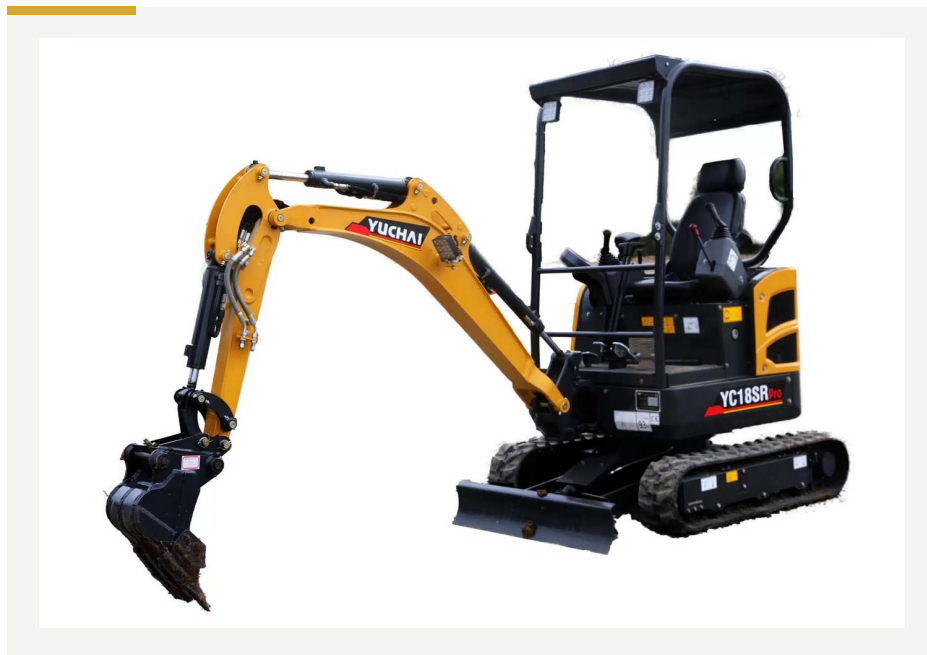

WEIGHT

1880 kg

POWER

19 hp

DIG DEPTH

2295 mm

BUCKET

0.05 m³

SPECIFICATIONS

Engine	Yanmar 3TNV80F	Standard Bucket Width	450mm
Rated Power	19 hp	Walking Speed	2/4km/h
Digging Depth	2295mm	Swing Speed of Platform	8.5~10.5rpm
Width	1080mm	Auxiliary Flow	17 l/m
Weight	1880kg	Boom Swing Angle (Left/Right)	50° / 70°
Standard Bucket Capacity	0.05m ³		

OVERVIEW

The new Yuchai U18 Dash 9 Pro is a 1.8Ton true zero tail swing mini excavator. It features a class leading 19hp Yanmar diesel engine matched to a high flow piston pump and quality main control valve for powerful yet smooth hydraulic operation. You can access sites quickly and easily with 2 speed travel motors and a variable track width of 1080mm to 1400mm. Features like high strength cast steel boom knuckle and joints combined with quality bushes and hardened pins makes this excavator stand above its opposition. Backed by a 3 year warranty with local spare parts support the U18 is a powerful digger that offers exceptional value for money.

STANDARD SPECIFICATION

- ✓ **Yanmar Engine**
Powered by a Yanmar 3TNV80F rated at 19 hp.
- ✓ **Expanding Tracks**
Variable-width undercarriage for tight-access work — 1080mm overall width.
- ✓ **Hammer / Auger Piping**
Auxiliary hydraulic piping fitted as standard, 17 l/m auxiliary flow, for hammers, auger drives and grabs.

1300 241 132

sales@eliteequipt.com

Unit 4/5-7 Graham St, Underwood QLD 4119

ABN 29 509 705 048 · eliteequipt.com

E&OE. Specifications subject to change without notice.

FULL SPECIFICATION

29 published figures – manufacturer's data

BASIC

Machine weight	1880 kg
Bucket capacity	0.05 m ³
Width of bucket	450 mm

PERFORMANCE

Engine model	Yanmar
Engine power	14.5/2400 kW/rpm
Max. gradeability	30 °
Max. digging force of arm	8.5 kN
Max. digging force of bucket	15.5 kN
Traveling speed	2/4 km/h
Slewing speed of platform	8.5~10.5 rpm

OPERATING RANGE

Max. digging height	3620 mm
Max. digging depth	2295 mm
Max. digging radius	4125 mm
Max. digging radius on ground level	4060 mm
Max. dumping height	2500 mm
Min. slewing radius	1690 mm
Max. vertical digging depth	1900 mm

TRANSPORT DIMENSIONS

Overall length	3690 mm
Overall width	1080 mm
Overall height	2350 mm

OTHER

Width of undercarriage	1080/1400 mm
Length of track	1585 mm
Width of track	230 mm
Height between undercarriage and ground	145 mm
Height between platform and ground	465 mm
Platform tail turning radius	700 mm
Track gauge	1260 mm
Fuel tank capacity	23 L
Hydraulic oil tank capacity	20 L

WORKING RANGE

TRANSPORT DIMENSIONS

millimetres

